

MPA1 SOLO 8




The MPA1 range of audio monitors from TSL Products is trusted by operators and engineers worldwide

Built on years of global broadcast audio expertise, the powerful and intuitive MPA1-SOLO-8 presents users with instant 'at a glance' monitoring of 8 AES audio sources and 8 Balanced Analogue Channels.

The MPA1-SOLO-8 provides audio monitoring of a 8 AES sources and 16 Balanced Analogue channels with an intuitive interface and easy to use controls.

The unique 'scroll to hear' function allows users to scroll through and monitor a total of 8 AES sources and 16 Analogue audio channels with ease.

As a member of the MPA1 range of audio monitors, the MPA1-SOLO-8 comes complete with a comprehensive web-page and SNMP support, allowing remote configuration and control.

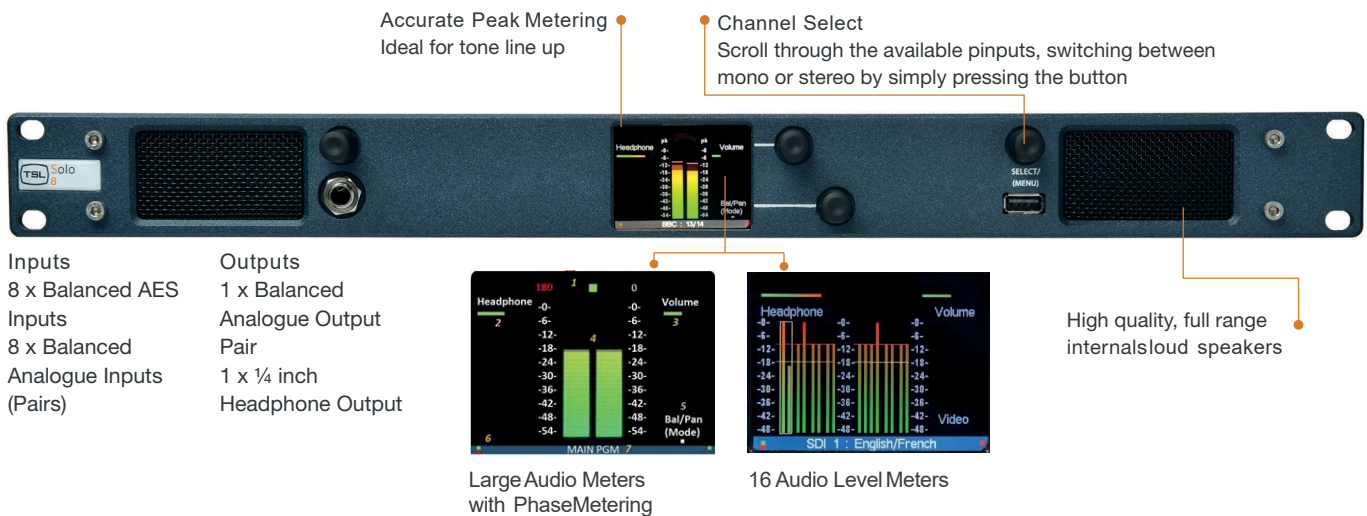

Inputs
8 x Balanced AES Inputs
8 x Balanced Analogue Inputs (Pairs)

Outputs
1 x Balanced Analogue Output Pair
1 x ¼ inch Headphone Output

FEATURES

- High quality audio monitoring of AES and Analogue audio sources
- Fast and intuitive scroll to listen operation of any chosen audio pair
- Audio level meter display showing all
- Analogue or all AES sources simultaneously
- 'Zoom View' of any audio pair including Audio Phase Metering
- High quality internal loudspeaker system
- Headphone and External Loudspeaker monitoring Outputs
- 8x Balanced AES Inputs
- 8x Balanced Analogue Inputs (Pairs)
- 8x GPIO
- 1x Balanced Analogue Output Pair
- 1x ¼ inch Headphone Output
- 1 x Front Panel USB
- 1x RJ45 Ethernet control and monitoring port
- SNMP support included

REAR PANEL






SPECIFICATIONS


| | | | |
|-----------------------|--|---------------------------|---|
| HEIGHT | 1RU | POWER | 85-264V ~ 50/60Hz, 0.75A – 0.5A Max 30W |
| DIMENSIONS | 483mm x 45mm x 100mm | UNIT CONTROL | SNMP, Webpage |
| WEIGHT | 1.4 kg | AES 3 | 8 x AES |
| DISPLAY | Audio Metering | BALANCED ANALOGUE INPUTS | 16 x Balanced Analogue |
| AUDIO CHANNELS | 16 | BALANCED ANALOGUE OUTPUTS | Fixed or Variable |
| SIGNAL TO NOISE RATIO | 72dB (+4dBu input level, THD+N A weighted) | UPGRADES | VIA USB |
| PEAK ACOUSTIC OUTPUT | 90dB @ 1foot | | |
| FREQUENCY RESPONSE | 40Hz to 20kHz +/- 1dB | | |

WEBPAGE CONTROL AND MONITORING

LIVE VIEW

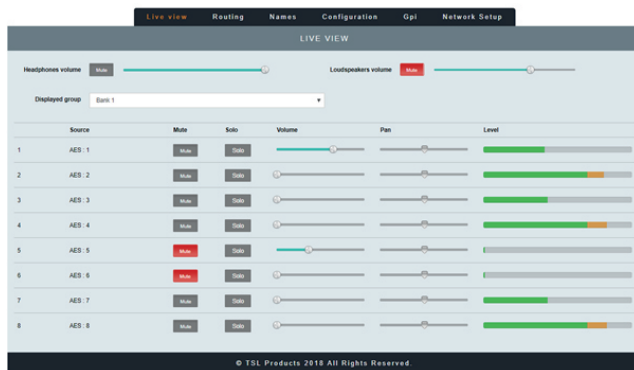

CONFIGURATION VIEW

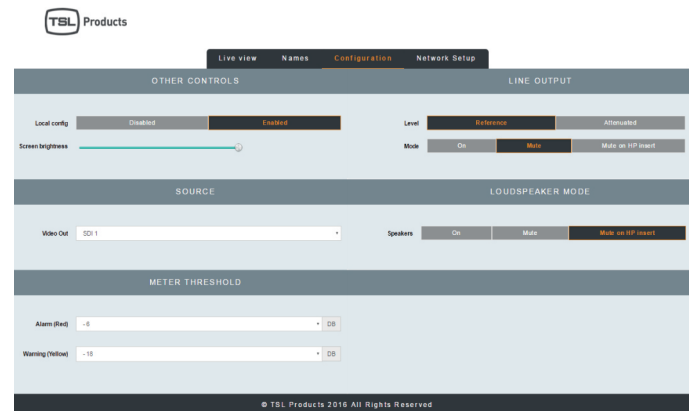

ORDERING INFORMATION

| Ordering Code | Description |
|---------------|--|
| MPA1-SOLO-8 | Simple 1RU audio monitor: Front panel display with 16 Level Meters, Source Names and Audio Phasedisplay. 8 x AES Inputs + 8 x Balanced Analogue inputs. 1 x Balanced Stereo Output, 1 x Front Panel Headphone Output, 8 x GPIO, Internal Loudspeakers, Internal PSU, Web-interface and SNMP Control. |

E. enquiries@tslproducts.com
 T. +44 1628 564 610
 T. +1 818 898 3380
www.tslproducts.com



DNF
CONTROLS

A valued part of TSL Products
www.dnfcontrols.com