

MPA1 SOLO DANTE



At just 100mm deep, our class-leading MPA1 Solo Dante and MPA1 Mix Dante audio monitors provide cost-effective and easy to use audio monitoring solutions for use in Dante/AES67 audio environments.

Built on years of global broadcast audio expertise, the powerful and intuitive MPA1 Mix Dante and MPA1 Solo Dante present users with instant 'at-a-glance' notification of 64 Dante/AES 67 audio streams on their front panel displays, as well as a further 64 audio streams derived from its dedicated MADI input.

The unique 'scroll to hear' function on the MPA1 Solo Dante allows users to scroll through and hear up to 128 available audio channels, whilst the MPA1 Mix Dante allows up to 16 unique Stereo Monitoring Mixes, comprising up to 8 Dante/AES67 and MADI sources to be created and recalled with ease.

As members of the MPA1 Range of audio monitoring products, both the MPA1 Mix Dante and MPA1 Solo Dante come complete with a comprehensive and simple to use web-gui allowing remote configuration, management and control.




FEATURES

- 1 x 1Gig/E Ethernet Interface for Dante/AES67 Networks
- Simple and Intuitive 'Scroll to hear' monitoring of up to 128 unique audio sources
- Front panel display of audio levels, complete with phase metering
- 1 x MADI Input Coaxial or Optical
- 1 x Ethernet connection for Network connectivity allowing monitoring and control via a web browser.
- 1 x front panel USB connector for system updates configuration Load/Save functions.
- 2 x Line Level Balanced Analogue Outputs for connection to external loudspeakers.
- Line level with selectable mute and -20dB.
- 1 x Headphone Output
- SNMP support included.



MPA1-MIX/SOLO-Dante

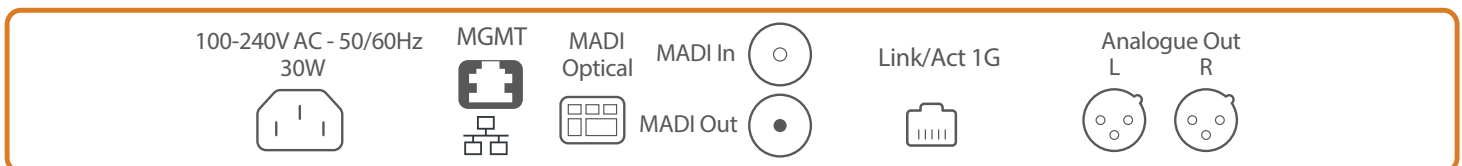


SPECIFICATIONS


HEIGHT	1RU	POWER	85-264V ~ 50/60Hz, 0.75A – 0.5A Max 30W
DIMENSIONS	483mm x 45mm x 100mm	UNIT CONTROL	SNMP, Webpage
WEIGHT	1.4 kg	SDI INPUTS	3G/HD/SD-SDI (SMPTE 424M, 292M, 259M)
DISPLAY	Audio Metering	AES 3id	SMPTE 276M
AUDIO CHANNELS	16	BALANCED ANALOGUE INPUTS	>60k Ohms
SIGNAL TO NOISE RATIO	72dB (+4dBu input level, THD+N A weighted)	BALANCED ANALOGUE OUTPUTS	Fixed or Variable
PEAK ACOUSTIC OUTPUT	90dB @ 1foot	UPGRADES	VIA USB
FREQUENCY RESPONSE	40Hz to 20kHz +/- 1dB		

WEBPAGE CONTROL AND MONITORING

LIVE VIEW

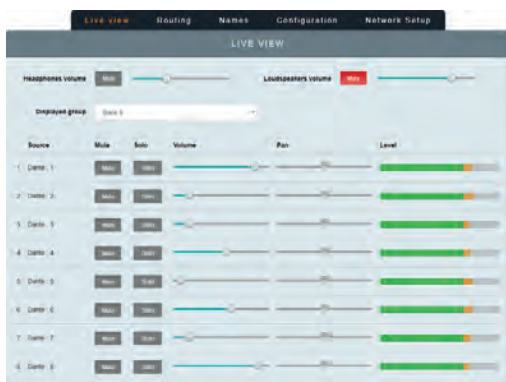

CONFIGURATION VIEW

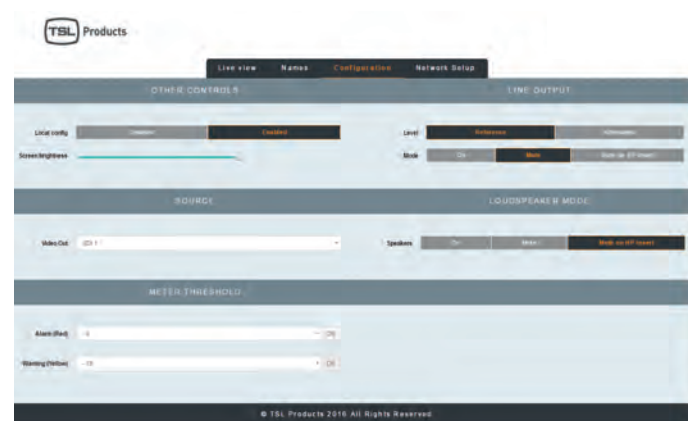

ORDERING INFORMATION

Ordering Code	Description
MPA1-SOLO-DANTE	Simple 1RU Dante/AES67 and MADI audio monitor: Front panel display with 16 Level Meters, Source Names and Audio Phase display. 1 x MADI Coaxial + 1 x MADI Optical input and 1 x DANTE Input. 1 x Balanced Stereo Output+ 1 Front Panel Headphone Output, Internal Loudspeakers, Internal PSU, Web-interface and SNMP Control. Dante Domain Manager Compliant.

E. enquiries@tslproducts.com
 T. +44 1628 564 610
 T. +1 818 898 3380
www.tslproducts.com



DNF
 CONTROLS
 A valued part of TSL Products
www.dnfcontrols.com