

MPA1 SOLO 8




The MPA1 range of audio monitors from TSL Products is trusted by operators and engineers worldwide

The MPA1-SOLO-8 provides audio monitoring of a 8 AES sources and 16 Balanced Analogue channels with an intuitive interface and easy to use controls.

Built on years of global broadcast audio expertise, the powerful and intuitive MPA1-SOLO-8 presents users with instant 'at a glance' monitoring of 8 AES audio sources and 8 Balanced Analogue Channels.

The unique 'scroll to hear' function allows users to scroll through and monitor a total of 8 AES sources and 16 Analogue audio channels with ease.

As a member of the MPA1 range of audio monitors, the MPA1-SOLO-8 comes complete with a comprehensive web-page and SNMP support, allowing remote configuration and control.

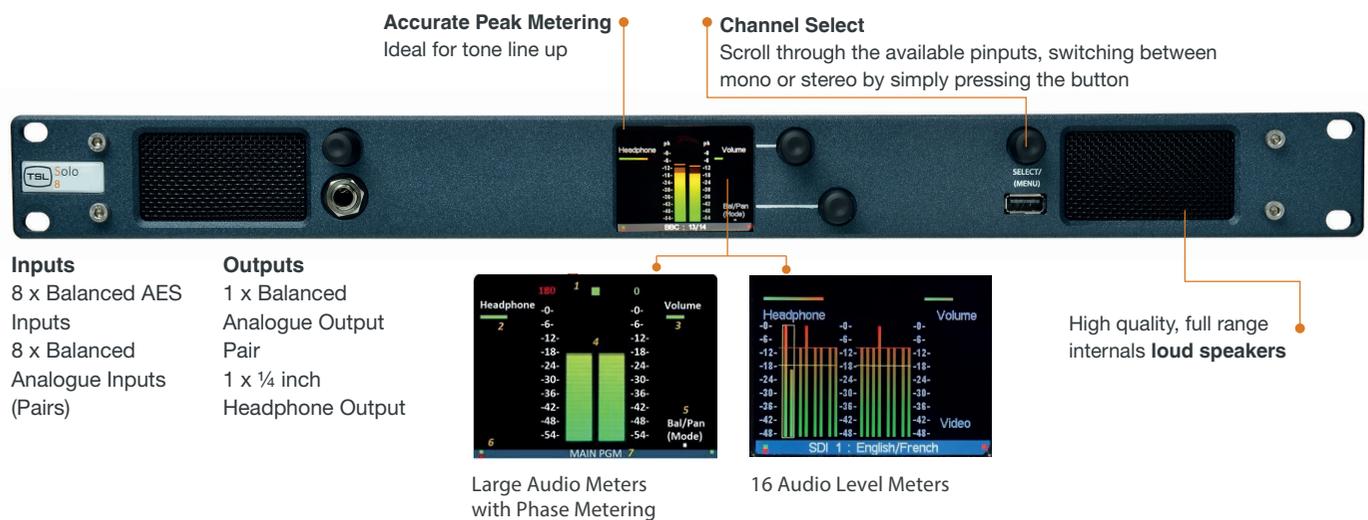

Inputs
8 x Balanced AES Inputs
8 x Balanced Analogue Inputs (Pairs)

Outputs
1 x Balanced Analogue Output Pair
1 x ¼ inch Headphone Output

Accurate Peak Metering
Ideal for tone line up

Channel Select
Scroll through the available pinputs, switching between mono or stereo by simply pressing the button

High quality, full range internal **loud speakers**



Large Audio Meters with Phase Metering



16 Audio Level Meters

FEATURES

- High quality audio monitoring of AES and Analogue audio sources
- Fast and intuitive scroll to listen operation of any chosen audio pair
- Audio level meter display showing all
- Analogue or all AES sources simultaneously
- 'Zoom View' of any audio pair including Audio Phase Metering
- High quality internal loudspeaker system
- Headphone and External Loudspeaker monitoring Outputs
- 8x Balanced AES Inputs
- 8x Balanced Analogue Inputs (Pairs)
- 8x GPIO
- 1x Balanced Analogue Output Pair
- 1x ¼ inch Headphone Output
- 1 x Front Panel USB
- 1x RJ45 Ethernet control and monitoring port
- SNMP support included

REAR PANEL






SPECIFICATIONS


HEIGHT	1RU	POWER	85-264V ~ 50/60Hz, 0.75A – 0.5A Max 30W
DIMENSIONS	483mm x 45mm x 100mm	UNIT CONTROL	SNMP, Webpage
WEIGHT	1.4 kg	AES 3	8 x AES
DISPLAY	Audio Metering	BALANCED ANALOGUE INPUTS	16 x Balanced Analogue
AUDIO CHANNELS	16	BALANCED ANALOGUE OUTPUTS	Fixed or Variable
SIGNAL TO NOISE RATIO	72dB (+4dBu input level, THD+N A weighted)	UPGRADES	VIA USB
PEAK ACOUSTIC OUTPUT	90dB @ 1foot		
FREQUENCY RESPONSE	40Hz to 20kHz +/- 1dB		

WEBPAGE CONTROL AND MONITORING

LIVE VIEW

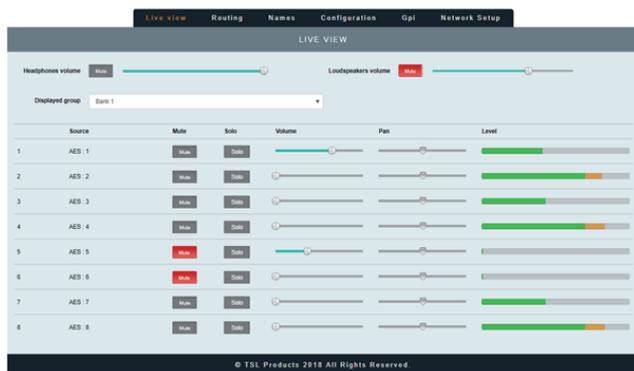

CONFIGURATION VIEW

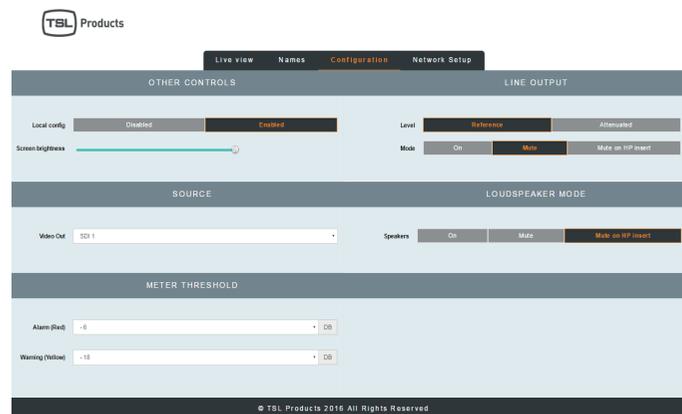

ORDERING INFORMATION

Ordering Code	Description
MPA1-SOLO-8	Simple 1RU audio monitor: Front panel display with 16 Level Meters, Source Names and Audio Phase display. 8 x AES Inputs + 8 x Balanced Analogue inputs. 1 x Balanced Stereo Output, 1 x Front Panel Headphone Output, 8 x GPIO, Internal Loudspeakers, Internal PSU, Web-interface and SNMP Control.

E. enquiries@tslproducts.com
 T. +44 1628 564 610
 T. +1 818 898 3380
www.tslproducts.com



DNF
 CONTROLS
 A valued part of TSL Products
www.dnfcontrols.com