

MPA1 SOLO MADI




The MPA1 range of audio monitors from TSL Products is trusted by operators and engineers worldwide

Built on years of global broadcast audio expertise, the powerful and intuitive MPA1-SOLO-MADI presents users with instant 'at a glance' monitoring of 64 MADI audio channels and 8 Balanced Analogue Channels.

The MPA1-SOLO-MADI provides audio monitoring of a single MADI stream comprising 64 channels and 8 Balanced Analogue channels with an intuitive interface and easy to use controls.

As a member of the MPA1 range of audio monitors, the MPA1-SOLO-MADI comes complete with a comprehensive web-page and SNMP support, allowing remote configuration and control.

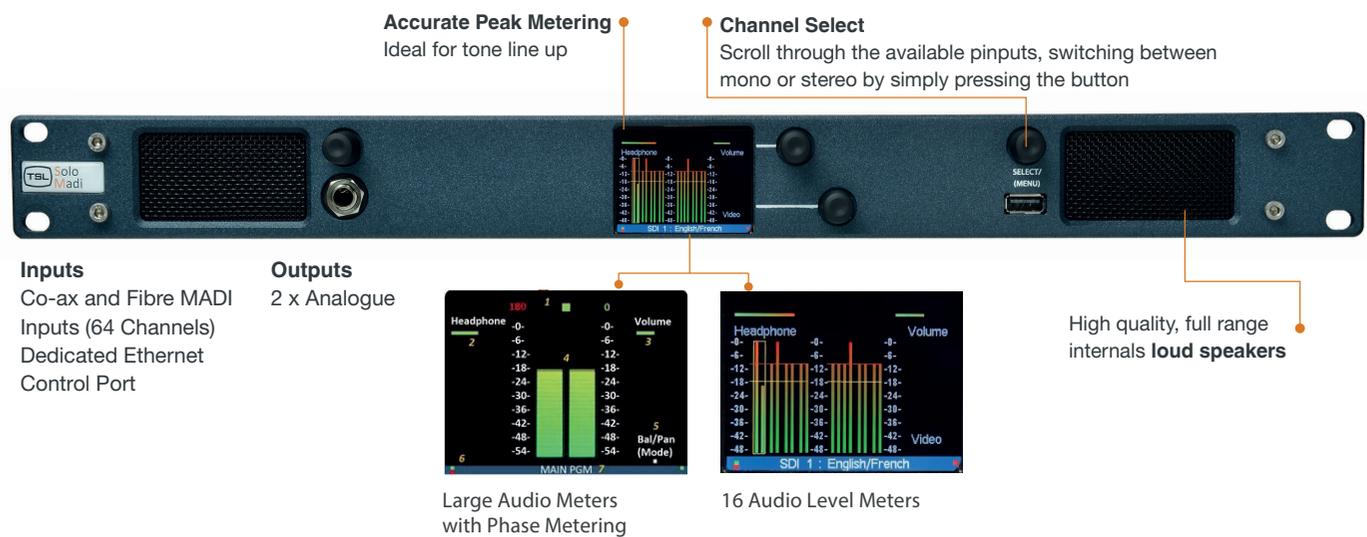

FEATURES

- High quality audio monitoring of 64 MADI audio channels and 8 Analogue audio channels.
- Fast and intuitive scroll to listen operation of any chosen audio pair.
- Audio level meter display showing 16 MADI channels.
- 'Zoom View' of any audio pair including Audio Phase Metering.
- 2 x Line Level Balanced Analogue Outputs for connection to external loudspeakers. Fixed or variable settings with -20dB Pad.
- Source Label Display.
- High quality internal loudspeaker system.
- Headphone and External Loudspeaker monitoring Outputs.
- Built in web server allows remote configuration, control and monitoring over an Ethernet network.
- Free software updates.

REAR PANEL






SPECIFICATIONS


HEIGHT	1RU	POWER	85-264V ~ 50/60Hz, 0.75A – 0.5A Max 30W
DIMENSIONS	483mm x 45mm x 100mm	UNIT CONTROL	SNMP, Webpage
WEIGHT	1.4 kg	MADI INPUTS	1 x Coaxial, 1 x Optical
DISPLAY	Audio Metering		
AUDIO CHANNELS	16	BALANCED ANALOGUE INPUTS	>60k Ohms
SIGNAL TO NOISE RATIO		BALANCED ANALOGUE OUTPUTS	Fixed or Variable
PEAK ACOUSTIC OUTPUT	90dB @ 1foot	UPGRADES	VIA USB
FREQUENCY RESPONSE			

WEBPAGE CONTROL AND MONITORING

LIVE VIEW

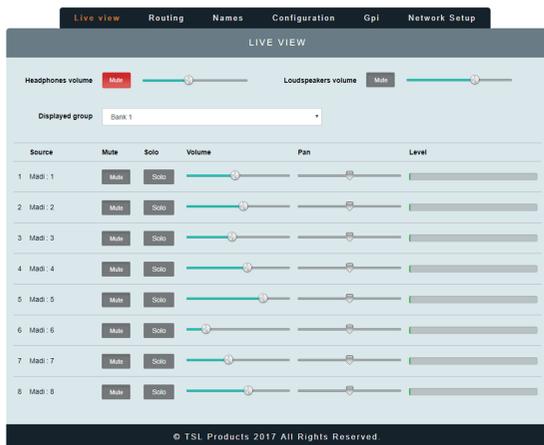

CONFIGURATION VIEW

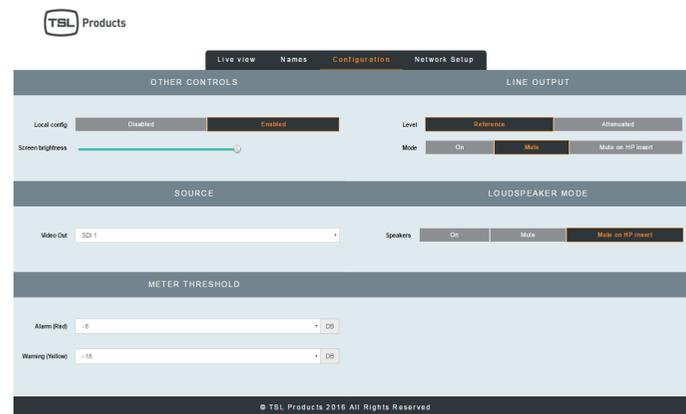

ORDERING INFORMATION

Ordering Code	Description
MPA1-SOLO-MADI	Simple 1RU MADI audio monitor: Front panel display with 16 Level Meters and Source Names and Audio Phase display. 1 x MADI Coaxial + 1 x MADI Optical input and 4 x Stereo Analogue inputs. 1 x Balanced Stereo Output+ 1 Front Panel Headphone Output, Internal Loudspeakers, Internal PSU and SNMP Control.

E. enquiries@tslproducts.com
 T. +44 1628 564 610
 T. +1 818 898 3380
www.tslproducts.com



DNF
 CONTROLS
 A valued part of TSL Products
www.dnfcontrols.com